

MV-CA058-1210C is a Crystal (XTAL) . This Crystal is an AT Cut resonator and comes in a Hermetic Ceramic 1.2x1.0mm package.

The device is qualified to meet the JEDEC standard for Pb-Free assembly and compliant to the RoHS directive.



Electrical Performance

Parameter	Min	Typ	Max	Units
General				
Output Frequency	24		54	MHz
Mode		Fundamental		
Operating Temperature		-10/+70 -40/+85		°C
Storage Temperature		-55/125		°C
Stability Over Temperature		±100 ±50 ±30 ±25 ±20 ±15		ppm
Frequency Tolerance (25°C ±3°C)		±30 ±15		ppm
Aging			±5	ppm/year
Drive Level		10	100	µW
Package Size		1.2 x 1.0 x 0.33		mm
Equivalent Circuit				
Load Capacitance (CL)		6 to 32		pF
Shunt Capacitance (C0)			5	pF
Equivalent Series Resistance (ESR)				
24 MHz to 37.3 MHz			100	Ω
37.4 MHz to 54 MHz			80	Ω
Insulation Resistance	500			MΩ

Package Information


Pin #	Function
Pin 1	Crystal Terminal
Pin 2	GND = Ground
Pin 3	Crystal Terminal
Pin 4	GND = Ground

Pad Layout

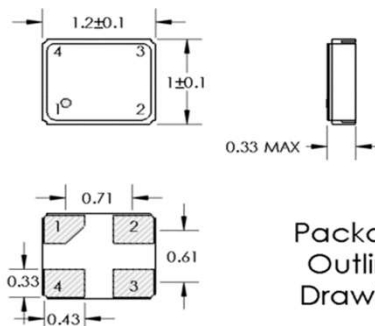

Package Outline Drawing

Ordering Information

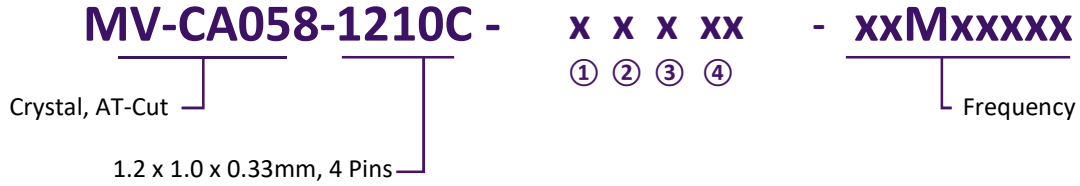

① Temp Range

J: -10/+70 °C
K: -40/+85 °C

② Temp Stability

A: ±100 ppm
C: ±50 ppm
D: ±30 ppm
E: ±25 ppm
F: ±20 ppm
G: ±15 ppm

③ Initial Tolerance

G: ±15 ppm
D: ±30 ppm

④ Load Capacitance

00: Series Resonance
F0: 6.0 pF
G0: 7.0 pF
J0: 9.0 pF
M5: 12.5 pF
T0: 18 pF
XX: Other (CL) Ordering Codes

Ordering Option Notes:

- For Other (CL) Ordering Codes (XX) go to the Load Cap guide (<http://datasheets.mv-electronics.com/XTAL-LoadCap.pdf>)