

MV-VD122-5032G is a Voltage Controlled Crystal Oscillator (VCXO) . This VCXO provide low phase noise and jitter performance over a wide operating temperature range, LVDS output and comes in a Hermetic Ceramic 5.0x3.2mm package. This device contains an internal voltage regulator resulting in excellent power supply rejection ratio.

The device is qualified to meet the JEDEC standard for Pb-Free assembly and compliant to the RoHS directive.

Electrical Performance

Parameter	Min	Typ	Max	Units
General				
Output Frequency	40		250	MHz
Operating Temperature		-10/+70 -40/+85		°C
Stability Over Temperature		±50 ±25 ±20		ppm
Start Up Time			2	ms
Package Size		5.0 x 3.2 x 1.3		mm
Supply				
Supply Voltage (Vdd)	3.14	3.3	3.47	V
Supply Current		20	30	mA
Current, Output Disabled			60	µA
Tuning				
Absolute Pull Range		±25 ±50		ppm
Control Voltage to reach Pull Range	0		Vdd	V
Control Voltage Impedance	5			MΩ
Control Voltage Modulation BW	15	20		kHz
Output				
Output Signal		LVDS		
Output Logic Level				
Output Level - Logic High		1.43	1.6	V
Output Level - Logic Low	0.9	1.1		V
Output Load		100 Ω		
Output Rise and Fall Time			0.5	ns
Duty Cycle	45		55	%
Enable / Disable				
Output Enable / Disable				
Output Enabled	Vdd x 0.7			V
Output Disabled			Vdd x 0.3	V
Phase Noise & Jitter				
Phase Noise: (122.88 MHz)				
10 Hz offset		-60		dBc/Hz
100 Hz offset		-90		dBc/Hz
1kHz offset		-118		dBc/Hz
10kHz offset		-138		dBc/Hz
100kHz offset		-149		dBc/Hz
Jitter				
RMS Jitter: (12kHz - 20MHz) - 122.88 MHz		0.11		ps

Notes:

- 1 Pull Range tested with Vc = 0V to 3.0V
- 2 Rise and Fall times measured from 20% to 80% of a full output swing
- 3 Power Supply pin should be filtered. e.g. 0.1µF or 0.01 µF Capacitor for optimal performance.
- 4 The Output is Enabled if the Enable/Disable is left open.

Maximum Ratings

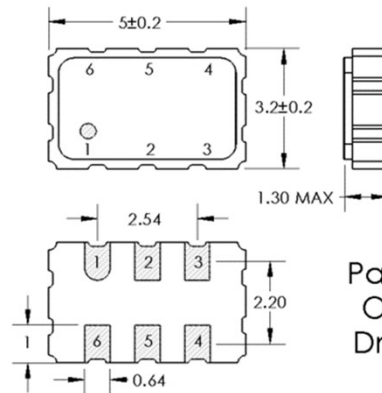

Storage Temp	-55°C to 125°C
Supply Voltage	-0.5V to +5.0V
Control Voltage	-0.5V to Vdd+0.5V
Enable/Disable Voltage	-0.5V to Vdd+0.5V
Junction Temperature	+150 °C

Maximum Ratings Notes:

- 1 Stresses in excess of the absolute maximum ratings can permanently damage the device.
- 2 Exposure to absolute maximum ratings for extended periods may adversely affect device reliability.

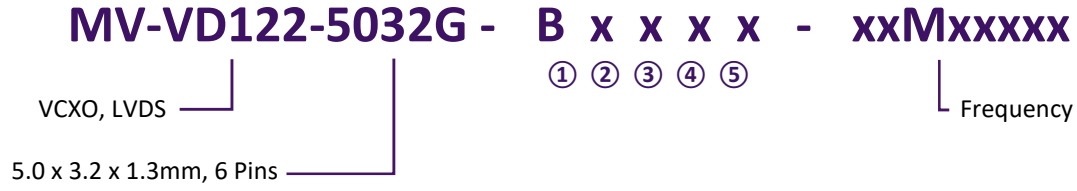
Package Information

Pin #	Function
Pin 1	Vc = Control Voltage or NC
Pin 2	E/D = Enable / Disable
Pin 3	GND = Ground
Pin 4	OUT = Output
Pin 5	C-OUT = Complimentary Output
Pin 6	Vdd = Supply Voltage

Pad Layout

Package Outline Drawing
Handling and Construction

Package Construction	Hermetic Ceramic
Contact Pads	Gold over Nickle
Moisture Sensivity Level	MSL 1
ESD, Human Body Model	500V
ESD, Charge Device Model	500V

Ordering Information



① Voltage

B: 3.3 V

② Temp Range

J: -10/+70 °C

K: -40/+85 °C

③ Temp Stability

C: ±50 ppm

E: ±25 ppm

F: ±20 ppm

④ Absolute Pull Range ⑤ Enable

E: ±25 ppm

C: ±50 ppm

O: No Enable Disable

H: Enable High

L: Enable Low

Part Number Configuration Notes:

- 1 Temp Range of -40 to +105°C available in some cases