

MV-XH330-5032G is a Crystal Oscillator (XO) . This XO provides low jitter performance, HCSL output and comes in a Hermetic Ceramic 5.0x3.2mm package. This device contains an internal voltage regulator resulting in excellent power supply rejection ratio.

The device is qualified to meet the JEDEC standard for Pb-Free assembly and compliant to the RoHS directive.

Electrical Performance

Parameter	Min	Typ	Max	Units
General				
Output Frequency	25		175	MHz
Operating Temperature		-10/+70 -40/+85		°C
Stability Over Temperature		±100 ±50 ±25 ±20		ppm
Start Up Time			10	ms
Package Size		5.0 x 3.2 x 1.3		mm
Supply				
Supply Voltage (Vdd)	3.14	3.3	3.47	V
Supply Current				
<80 MHZ		25	40	mA
>80 MHZ		33	47	mA
Supply Voltage (Vdd)	2.38	2.5	2.63	V
Supply Current				
<80 MHZ		21	36	mA
>80 MHZ		29	42	mA
Current, Output Disabled			15	µA
Output				
Output Signal		HCSL		
Output Logic Level				
Output Level - Logic High	660		850	mV
Output Level - Logic Low	-150		150	mV
Output Load		50 Ω to Ground		
Output Rise and Fall Time		0.2	0.4	ns
Duty Cycle	45		55	%
Enable / Disable				
Output Enable / Disable				
Output Enabled	Vdd x 0.7			V
Output Disabled			Vdd x 0.3	V

Notes:

- 1 Stability includes initial accuracy, operating temperature, supply voltage, shock and vibration (not under operation) and aging
- 2 Rise and Fall times measured from 20% to 80% of a full output swing
- 3 Power Supply pin should be filtered. e.g. 0.1µF or 0.01 µF Capacitor for optimal performance.
- 4 The Output is Enabled if the Enable/Disable is left open.

Maximum Ratings

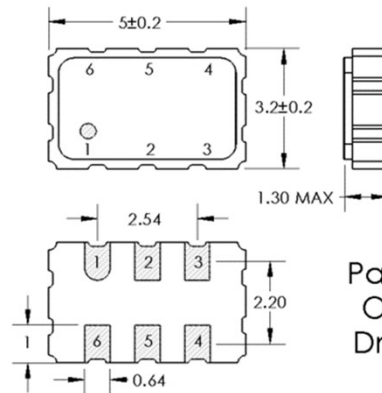

Storage Temp	-55°C to 125°C
Supply Voltage	-0.3V to +4.0V
Enable/Disable Voltage	-0.3V to Vdd+0.3V
Junction Temperature	+125 °C

Maximum Ratings Notes:

- 1 Stresses in excess of the absolute maximum ratings can permanently damage the device.
- 2 Exposure to absolute maximum ratings for extended periods may adversely affect device reliability.

Package Information

Pin #	Function
Pin 1	E/D = Enable / Disable or NC
Pin 2	E/D = Enable / Disable or NC
Pin 3	GND = Ground
Pin 4	OUT = Output
Pin 5	C-OUT = Complimentary Output
Pin 6	Vdd = Supply Voltage

Pad Layout

Package Outline Drawing
Handling and Construction

Package Construction	Hermetic Ceramic
Contact Pads	Gold over Nickle
Pad Metal Thickness	Gold (0.3µm min - 1.0µm max) over Nickel
Moisture Sensitivity Level	MSL 1
ESD, Human Body Model	1500V
ESD, Charge Device Model	1500V

Ordering Information

MV-XH330-5032G - X X X X - xxMxxxxx



① Voltage

- B: 3.3 V
- D: 2.5 V

② Temp Range

- J: -10/+70 °C
- K: -40/+85 °C

③ Temp Stability

- A: ±100 ppm
- C: ±50 ppm
- E: ±25 ppm
- F: ±20 ppm

④ Enable

- 1: Enable on Pin 1
- 2: Enable on Pin 2