

MV-XP310-5032G is a Crystal Oscillator (XO) . This XO provides low jitter performance, LV-PECL output and comes in a Hermetic Ceramic 5.0x3.2mm package. This device contains an internal voltage regulator resulting in excellent power supply rejection ratio.

The device is qualified to meet the JEDEC standard for Pb-Free assembly and compliant to the RoHS directive.

**Electrical Performance**

Parameter	Min	Typ	Max	Units
<b>General</b>				
Output Frequency	12.5		220	MHz
Operating Temperature	-10/+70 -40/+85 -40/+105 -40/+125			°C
Stability Over Temperature	±100 ±50 ±25 ±20			ppm
Start Up Time			10	ms
Package Size	5.0 x 3.2 x 1.3			mm
<b>Supply</b>				
Supply Voltage (Vdd)	3.14	3.3	3.47	V
Supply Current				
<175 MHZ		60	71	mA
>175 MHZ		64	80	mA
Supply Voltage (Vdd)	2.38	2.5	2.63	V
Supply Current				
<175 MHZ		56	66	mA
>175 MHZ		58	74	mA
Current, Output Disabled			30	µA
<b>Output</b>				
Output Signal	LV-PECL			
Output Logic Level				
Output Level - Logic High	Vdd-1.040	Vdd-0.950	Vdd-0.880	V
Output Level - Logic Low	Vdd-1.810	Vdd-1.700	Vdd-1.620	V
Output Load	50 Ω into Vdd-2V			
Output Rise and Fall Time		0.25	0.6	ns
Duty Cycle	45		55	%
<b>Enable / Disable</b>				
Output Enable / Disable				
Output Enabled	Vdd x 0.7			V
Output Disabled			Vdd x 0.3	V
<b>Phase Noise &amp; Jitter</b>				
Phase Noise: (156.25 MHz)				
10 Hz offset		-70		dBc/Hz
100 Hz offset		-104		dBc/Hz
1kHz offset		-133		dBc/Hz
10kHz offset		-148		dBc/Hz
100kHz offset		-154		dBc/Hz
1MHz offset		-155		dBc/Hz
10MHz offset		-157		dBc/Hz
Jitter				
RMS Jitter: (12kHz - 20MHz) - 156.25 MHz		0.09		ps

**Notes:**

- 1 Stability includes initial accuracy, operating temperature, supply voltage, shock and vibration (not under operation) and aging
- 2 Rise and Fall times measured from 20% to 80% of a full output swing
- 3 Power Supply pin should be filtered. e.g. 0.1µF or 0.01 µF Capacitor for optimal performance.
- 4 The Output is Enabled if the Enable/Disable is left open.

**Maximum Ratings**

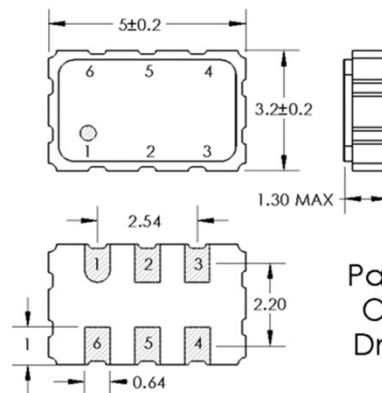

Storage Temp	-55°C to 150°C
Supply Voltage	-0.3V to +4.0V
Enable/Disable Voltage	-0.3V to Vdd+0.3V
Junction Temperature	+150 °C

**Maximum Ratings Notes:**

- 1 Stresses in excess of the absolute maximum ratings can permanently damage the device.
- 2 Exposure to absolute maximum ratings for extended periods may adversely affect device reliability.

**Package Information**

Pin #	Function
Pin 1	E/D = Enable / Disable or NC
Pin 2	E/D = Enable / Disable or NC
Pin 3	GND = Ground
Pin 4	OUT = Output
Pin 5	C-OUT = Complimentary Output
Pin 6	Vdd = Supply Voltage

**Package and Assembly Notes:**
**Pad Layout**

**Package Outline Drawing**
**Handling and Construction**

Package Construction	Hermetic Ceramic
Contact Pads	Gold over Nickle
Pad Metal Thickness	Gold (0.3µm min - 1.0µm max) over Nickel
Moisture Sensitivity Level	MSL 1
ESD, Human Body Model	1500V
ESD, Charge Device Model	1000V

**Ordering Information**
**MV-XP310-5032G -**

XO, LV-PECL

5.0 x 3.2 x 1.3mm, 6 Pins

**X X X X**

① ② ③ ④

**- xxMxxxxxx**

Frequency

① Voltage

B: 3.3 V

D: 2.5 V

② Temp Range

J: -10/+70 °C

K: -40/+85 °C

L: -40/+105 °C

③ Temp Stability

A: ±100 ppm

C: ±50 ppm

E: ±25 ppm

F: ±20 ppm

④ Enable

1: Enable on Pin 1

2: Enable on Pin 2