

MV-VC116-5032G is a Voltage Controlled Crystal Oscillator (VCXO) . This VCXO provide low phase noise and jitter performance over a wide operating temperature range, CMOS output and comes in a Hermetic Ceramic 5.0x3.2mm package. This device contains an internal voltage regulator resulting in excellent power supply rejection ratio.

The device is qualified to meet the JEDEC standard for Pb-Free assembly and compliant to the RoHS directive.

Electrical Performance

Parameter	Min	Typ	Max	Units
General				
Output Frequency	80		126	MHz
Operating Temperature		-10/+70 -40/+85		°C
Stability Over Temperature		±50 ±25 ±20		ppm
Start Up Time			2	ms
Package Size		5.0 x 3.2 x 1.3		mm
Supply				
Supply Voltage (Vdd)	3.14	3.3	3.47	V
Supply Current		20	24	mA
Current, Output Disabled		1	2	mA
Tuning				
Absolute Pull Range		±50		ppm
Control Voltage to reach Pull Range	0.3		Vdd + 0.5	V
Control Voltage Impedance	5			MΩ
Control Voltage Modulation BW	15			kHz
Output				
Output Signal		CMOS		
Output Logic Level				
Output Level - Logic High	Vdd-0.4			V
Output Level - Logic Low			0.4	V
Output Load		15 pF		
Output Rise and Fall Time		1.4	1.9	ns
Duty Cycle	45		55	%
Enable / Disable				
Output Enable / Disable				
Output Enabled	Vdd x 0.7			V
Output Disabled			Vdd x 0.3	V
Phase Noise & Jitter				
Phase Noise: (122.88 MHz)				
10 Hz offset		-68		dBc/Hz
100 Hz offset		-103		dBc/Hz
1kHz offset		-124		dBc/Hz
10kHz offset		-143		dBc/Hz
100kHz offset		-154		dBc/Hz
1MHz offset		-160		dBc/Hz
10MHz offset		-161		dBc/Hz
Jitter				
RMS Jitter: (12kHz - 20MHz) - 122.88 MHz		0.07		ps

Notes:

- 1 Pull Range tested with Vc = 0.3V to 3.0V
- 2 Rise and Fall times measured from 20% to 80% of a full output swing
- 3 Power Supply pin should be filtered. e.g. 0.1µF or 0.01 µF Capacitor for optimal performance.
- 4 The Output is Enabled if the Enable/Disable is left open.

Maximum Ratings

Storage Temp	-55°C to 125°C
Supply Voltage	-0.5V to +7.0V
Control Voltage	-0.5V to Vdd+0.5V
Enable/Disable Voltage	-0.5V to Vdd+0.5V
Junction Temperature	+150 °C



Maximum Ratings Notes:

- 1 Stresses in excess of the absolute maximum ratings can permanently damage the device.
- 2 Exposure to absolute maximum ratings for extended periods may adversely affect device reliability.

Package Information

Pin #	Function
Pin 1	Vc = Control Voltage or NC
Pin 2	E/D = Enable / Disable or NC
Pin 3	GND = Ground
Pin 4	OUT = Output
Pin 5	NC = Make No Connection
Pin 6	Vdd = Supply Voltage

Pad Layout

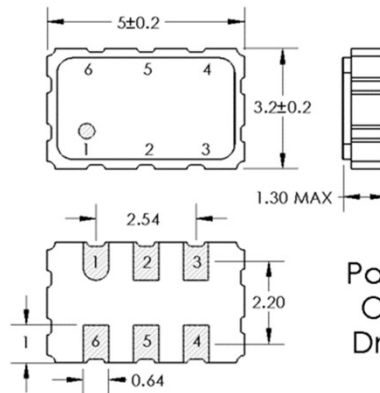

Package Outline Drawing

Handling and Construction

Package Construction	Hermetic Ceramic
Contact Pads	Gold over Nickle
Moisture Sensivity Level	MSL 1
ESD, Human Body Model	500V
ESD, Charge Device Model	500V

Ordering Information
MV-VC116-5032G - B x x C x - xxMxxxxx

① Voltage

B: 3.3 V

② Temp Range

J: -10/+70 °C

K: -40/+85 °C

③ Temp Stability

C: ±50 ppm

E: ±25 ppm

F: ±20 ppm

④ Absolute Pull Range

C: ±50 ppm

⑤ Enable

0: No Enable Disable

H: Enable High

L: Enable Low